Elixo 500 230 V RTS

Motorization for sliding gates

UP TO 8 M | 500 KG



Reliable and hard-wearing for sliding gates

• Easy to install

- > Easy access to ground fixation screws from the top
- > No adjustment needed from the installer

. Reliability and durability

- > Mechanical design based on 30 years of group experience
- > Suitable for regular use and tested for 180,000 openings and closings

• Convenient to use

> Easy key unlocking from inside


Packs







Standard installation

- 1. Elixo 500 230 V RTS
- 2. Amber light
- 3. Outdoor antenna

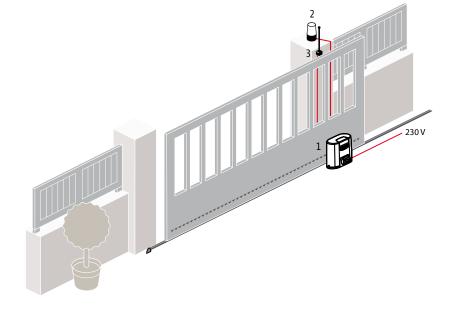

General overall size





Technical characteristics

Mains power supply	230 V (-15% / +10%) - 50 Hz
Motor voltage	230 V
Maximum power consumption	290 W
Accessories power supply	24 Vdc / 200 mA
Maximum number of operations/day	100
Opening time to 3 m	21 s

RTS radio frequency	433.42 MHz
Number of remote controls	36 channels maximum
Index of protection	IP 44
Operating temperature	-20°C to +60°C
Tested for	180,000 openings and closings

Special accessories



Radio keypad metal RTS

Ref.	1841111	(France)
Ref.	1841116	(International)



1 meter of steel-reinforced nylon rack

Ref.	9011090	(Top fastening)
Ref.	9011089	(Bottom fastening)



Passive safety edge

Ref. 9014597 (Narrow profile 1)	
Ref. 9014598 (Wide profile 2)	